



LADDER CARTS

Three-section cart adapts to worksite requirements. Centrally located, stepped-down ladder platform carries up to 6-ft. ladder without hitting walls, doorways or elevators. Unique vertical profile offers higher worksurface height for improved ergonomics. Can be assembled for transporting long items. Square footprint offers optimal maneuverability. Shelves feature molded-in tool and pipe holders. Molded-in handles. Powder coated steel and structural foam construction. 5" casters (two locking). 500-lb. capacity. Black/Red.

A. Ladder Cart with Open Ends


Seven shelves, plus ladder platform and organizer tray for increased storage capacity. 27w x 31½l x 42h. Shpg. wt. 69 lbs.

RCP 9T57 BLA **Each**

B. Ladder Cart with Cabinet

Lockable storage for safety and security (lock not incl.). Three shelves on one end, storage cabinet on the other. Also features ladder platform and organizer tray. 27w x 31½l x 42h. Shpg. wt. 99 lbs.

RCP 9T58 BLA **Each**

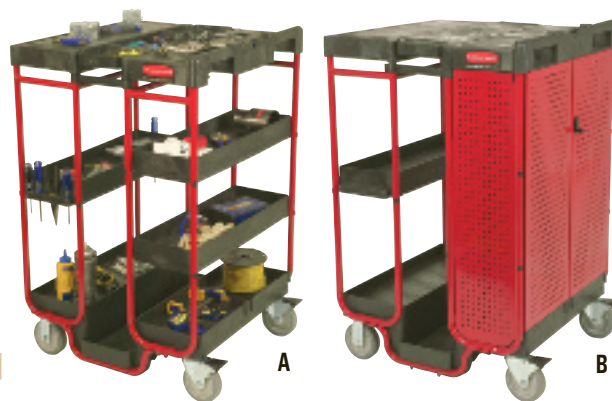

C. Folding Two-Step Step Stool

Sets up quickly; folds down to slim depth for storage in tight spaces and convenient transport. Slip-resistant surfaces on steps and foot pads. Rust- and dent-resistant reinforced polypropylene cleans easily. Skid-resistant feet. Supports 300 lbs. Cylinder color. Open: 18¾w x 21d x 22¾h. Folded: 18¾w x 5¼d x 25h. Shpg. wt. 6.93 lbs.

RCP 4209 CYL **Each**



D. Mobile Two-Step Step Stool

Push stool into position, step on it, and casters instantly retract. Antiskid bottom holds firmly. Textured step surface. Supports 350 lbs. Plastic. 16 dia. (at base) x 13h. Shpg. wt. 7 lbs.

No.	Color	Each
RCP 2523 BLA	Black	
RCP 2523 BEI	Beige	



E. #624 Folding Fiberglass Three-Step Step Stool

For electricians, light institutional and frequent household use. Nonconductive green fiberglass rails with yellow aluminum top cap. 3" serrated steps, slip-resistant foot caps. Pinch-resistant side locks. ANSI Type II, Commercial, 225-lb. duty rating. UL Compliant. 17w x 22 spread x 24h. Shpg. wt. 7 lbs.

DAV 624-02BX **Each**



F. #566 Aluminum Euro Platform Ladder

For household use. Locking 36" high platform provides large standing area. Top rail for safety and convenience. Deeply serrated extruded aluminum steps for security. Slip-resistant foot caps. ANSI Type III, Household, 200-lb. duty rating. 18¾w x 31 spread x 60h. Shpg. wt. 9 lbs.

DAV 566-03BX **Each**



G. #592 Six-Foot Fiberglass Commercial Stepladder

Channeled nonconductive fiberglass rails for strength and corrosion resistance. Deeply serrated U-channel 3" steps. Angle bracing strengthens and stabilizes top step, bottom step and rear brace. Yellow molded plastic top holds quart paint can and has slots for small hand tools. Pinch-resistant, heavy-gauge outside side locks. ANSI Type II, Commercial, 225-lb. duty rating. 22¼w x 43½ spread x 72h. Shpg. wt. 16 lbs.

◆ DAV 592-06BX **Each**



- All ladders meet or exceed ANSI and OSHA safety codes
- Select ladder of proper duty rating to support combined weight of user and materials
- **WARNING:** Metal ladders conduct electricity. Do not use where contact may be made with live electrical circuits

◆ This symbol denotes items that cannot ship via UPS.

Items with this symbol require assembly.